



TRUCK & BUS TYRE CATELOGUE

ADVANCE TYRE (VIETNAM) CO., LTD

ADD: 105-109D, 110A2, LONG GIANG INDUSTRIAL PARK, TAN LAP 1 COMMUNE, TAN PHUOC COUNTY,
TIEN GIANG PROVINCE, VIET NAM

POSTAL CODE: 863900/PHONE: +84-02733649888

ABOUT US

Making Your Safety Our Priority Since 1958

Established in 1958, GTC (Guizhou Tyre Co., Ltd) is one of the Chinese leading tyre manufacturers, the home of ADVANCE brand with production bases in China and Vietnam.

GTC relies on the strong R&D strength and focuses on new industrialization and continuously drives the internationalized, intelligent, green and high-quality development.

GTC has a complete product specifications and models and the products have been popularly sold to 130+ countries and regions.

The company's products have been authenticated by ISO9001 quality system certificate, ISO/TS 16949 quality system certificate, 3C, DOT, E-MARK, GCC, SNI, BIS and INMETRO certificates.

Global Localized



WHY CHOOSE US

■ One-stop Business Solutions Provider

4 major categories
 9 subcategories
 3000+ SKUs

■ Value Solutions Provider

The quality of the product is between tier **1&2**, the price of the product is between tier **3&4**

■ Technical Solutions Provider

≥3% R&D investment annually
 1 national tyre technology R&D center and a postdoctoral workstation
 30+ FE support in the field
 1000+ R&D personnel undertaking high-quality products and technologies

■ Market Oriented & Best Customer Experience

Issuing PI: in **48h** after getting the orders
 Leading time: **30-45** working days
 Claim: reply in **7** working days
 Warranty: **5** years from DOT

■ Intelligent Manufacturing

5G and **AI** built smart and lean production management processes.
 Achieving intelligent manufacturing is our pursuit and strategy.

■ Sustainability

We are committed to reaching all **carbon neutral** and **social responsibility** goals.

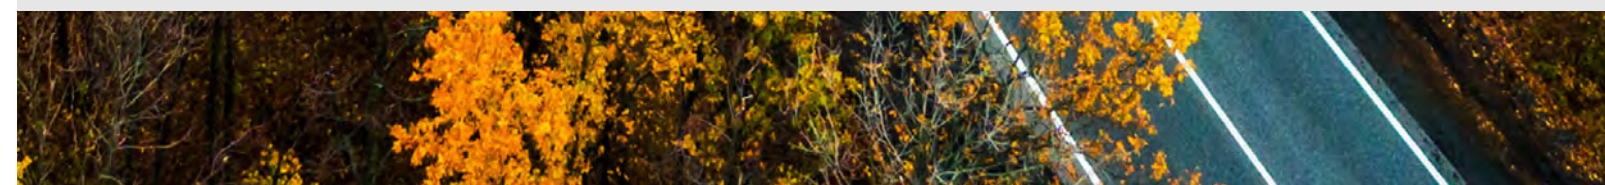


TABLE OF CONTENTS

CONDITION	STEER POSITION	
Mid/Long Haul Highway	Premium Patterns	First Generation Patterns
	GL-S ① 06 GR-S ① 07	GL256F 08
CONDITION	DRIVE POSITION	
Mid/Long Haul Highway	Premium Patterns	First Generation Patterns
	GR-D ① 9 GR-D ② 10 GL-D ① 12	GL266D ULT 13 GL267D 14 GL268D 15
CONDITION	ALL POSITION	
Mid/Long Haul Highway	Premium Patterns	First Generation Patterns
	GR-A ① 16	GL282A 18 GL286A 19 GL283A 20 GL296A 22 GL655A 23

CONDITION	TRAILER POSITION	
Mid/Long Haul Highway	Premium Patterns	First Generation Patterns
	GR-T ① 24 GR-T ② 25	GL251T 26 GL252T 27 GL285T 28 GL286T 29
CONDITION	Premium Patterns	First Generation Patterns
Urban Bus	GL868A 30	
CONDITION	Premium Patterns	First Generation Patterns
On/Off The Road		
	GL688A 32 GC-A ① 33 GC-D ① 34	GL687D 35 GL680A 39 GLE-1 43 GL291A 36 GL682A 40 GLE-2 44 GL691A 37 GL689A 41 GL072A 45 GL665A 38 GL670T 42
Off The Road	GM-A ① 46	GL073A 47 GL909A 48



GL-S ①

Premium Patterns

- Features new rubber compounds to minimize heat development in the tread.
- The tread compound improves rolling resistance and fuel efficiency.
- Robust casing for longer tire life and excellent retreadability.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	276	1048	720	2800	15.00	8.25
11R22.5	16	146/143	L	276	1048	830	3000	15.00	8.25
275/80R22.5	14	147/144	M	280	1005	760	3075	15.00	8.25
275/80R22.5	16	149/146	L	280	1005	830	3250	15.00	8.25
295/75R22.5	14	144/141	L	298	1007	760	2800	15.00	9.00
295/75R22.5	16	146/143	L	298	1007	830	3000	15.00	9.00

GR-S ①

Premium Patterns

- Our most advanced compounding for fuel efficiency and tread durability.
- Enhanced siping provides superior traction throughout tread life.
- Upgraded tread groove design helps maintain integrity as the tread wears, providing water evacuation throughout life.
- Enhanced siping design to help reduce irregular wear, maximizing usable tread life.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/55R22.5	20	160	K	386	996	900	4500	15.50	12.25



GL256F



- Self-cleaning technology of the groove and extra deep under tread designing make tire have excellent self-cleaning property and puncture resistance, so as to provide optimum safety guarantee.
- Advanced groove technology enhances the tire’s self-cleaning capabilities and puncture resistance, ensuring top-notch safety.
- The deep tread design extends the tire’s lifespan, offering superior durability.
- A robust sidewall design safeguards against scuffing, delivering unparalleled protection for the tire’s profile.
- A specially formulated tread compound reduces rolling resistance, contributing to improved fuel efficiency.
- Super strong bead with design patent provides optimum carrying capacity and resistance to failure.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/65R22.5	24	164	K	386	1070	900	5000	16.50	11.75

GR-D ①

Premium Patterns



- An open shoulder regional drive tire engineered for fuel efficiency, longer wear, and exceptional retreadability, the GR-D delivers performance and value in this high demand application.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	276	1062	720	2800	22.80	8.25
11R22.5	16	146/143	L	276	1062	830	3000	22.80	8.25
295/75R22.5	14	144/141	L	298	1023	760	2800	22.80	9.00
295/75R22.5	16	146/143	L	298	1023	830	3000	22.80	9.00
295/80R22.5	18	152/148	M	308	1057	850	3550	20.30	9.00
295/80R22.5	20	154/149	M	308	1057	900	3750	20.30	9.00
315/70R22.5	18	154/150	L	315	1013	900	3750	19.50	9.00
315/70R22.5	20	156/150	L	315	1013	900	4000	19.50	9.00
315/80R22.5	20	156/150	L	315	1085	850	4000	20.80	9.00



GR-D ②

Premium Patterns

- Excellent mileage performance.
- Versatile multipurpose drive tire suitable for a wide range of conditions.
- Superb traction.
- High resistance to irregular wear.
- Excellent durability and retreadability.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
215/75R17.5	12	126/124	M	217	773	700	1700	15.30	6.00
215/75R17.5	16	135/133	J	217	773	860	2180	15.30	6.00
235/75R17.5	14	132/130	M	238	810	775	2000	16.80	6.75
245/70R17.5	16	136/134	M	252	788	850	2240	16.00	7.50
245/70R19.5	16	136/134	M	252	838	830	2240	16.00	7.50
265/70R19.5	16	140/138	M	272	869	775	2500	16.00	7.50
275/70R22.5	18	148/145	M	284	960	900	3150	17.00	8.25
285/70R19.5	16	146/144	L	285	894	900	3000	16.00	8.25
295/60R22.5	18	150/147	K	302	924	900	3350	18.30	9.00
315/60R22.5	18	152/148	L	321	952	900	3550	18.30	9.75
315/60R22.5	20	154/150	L	321	952	900	3750	18.30	9.75



GL-D ①

Premium Patterns

- A fuel-efficient drive tire that delivers even treadwear and extended service life.
- The GL-D addresses the most important factors when choosing a long-haul drive tire.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (in)	Overall Diam. (in.)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	276	1058	720	2800	19.80	8.25
11R22.5	16	146/143	L	276	1058	830	3000	19.80	8.25
275/80R22.5	14	147/144	M	280	1009	760	3075	17.00	8.25
275/80R22.5	16	149/146	L	280	1009	830	3250	17.00	8.25
295/75R22.5	14	144/141	L	298	1017	760	2800	19.80	9.00
295/75R22.5	16	146/143	L	298	1017	830	3000	19.80	9.00

GL266D ULT

- Low rolling resistance designing makes the fuel consumption of the vehicle significantly decrease and the cost of the truckload effectively decrease.
- Optimized shoulder profile designing improves tire’s heat dispersion and increases crown durability.
- Completely new crown designing largely strengthens tire puncture resistance and effectively improves safety.
- Optimized groove designing guarantees tire wet grip performance.
- Mid/Long Haul Highway Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	268	1070	720	2800	25.80	8.25
11R22.5	16	146/143	M	268	1070	830	3000	25.80	8.25
295/75R22.5	14	144/141	M	308	1037	760	2800	25.80	9.00
295/75R22.5	16	146/143	L	308	1037	830	3000	25.80	9.00



GL267D



- Completely optimized structure and compound design improves tire cost performance ratio.
- The tread design is divided into two layers, utilizing different tread compounds to reduce tire heat generation.
- Optimized pattern shape design guarantees tire excellent wet grip performance.
- Unidirectional pattern designing and unique block designing provide excellent driving properties.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
295/80R22.5	18	152/148	M	305	1049	850	3550	18.30	9.00
295/80R22.5	20	154/149	M	305	1049	900	3750	18.30	9.00
315/70R22.5	18	154/150	L	316	1008	900	3750	18.30	9.00
315/70R22.5	20	156/150	L	316	1008	900	4000	18.30	9.00
315/80R22.5	20	156/150	L	313	1080	850	4000	18.30	9.00

GL268D



- Premium open shoulder with directional tread pattern.
- Deep tread with siping allows for superior traction in varying road conditions.
- SmartWay approved.
- Low Emission Technology.
- Mid/Long Haul Highway Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	273	1060	720	2800	20.90	8.25
11R22.5	16	146/143	M	273	1060	830	3000	20.90	8.25
245/70R19.5	16	136/134	M	256	849	830	2240	18.80	7.50



GR-A ①

Premium Patterns

- Designed to stand up to the high scrub conditions of life in the city, the GR-A is an all-position workhorse offering premium performance and durable construction for the most demanding applications.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	276	1053	720	2800	17.50	8.25
11R22.5	16	146/143	L	276	1053	830	3000	17.50	8.25
215/75R17.5	12	126/124	M	217	763	700	1700	13.50	6.00
235/75R17.5	14	132/130	M	238	792	775	2000	14.20	6.75
245/70R17.5	16	136/134	M	252	782	850	2240	13.00	7.50
245/70R19.5	16	136/134	M	252	835	830	2240	14.50	7.50
255/70R22.5	16	140/137	M	255	928	830	2500	15.00	7.50

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
265/70R19.5	16	140/138	M	272	862	775	2500	12.50	7.50
275/70R22.5	18	148/145	M	284	957	900	3150	15.50	8.25
275/80R22.5	14	147/144	M	280	1010	760	3075	17.50	8.25
275/80R22.5	16	149/146	L	280	1010	830	3250	17.50	8.25
285/70R19.5	16	146/144	L	285	888	900	3000	13.00	8.25
285/70R19.5	18	150/148	J	285	888	900	3350	13.00	8.25
295/60R22.5	18	150/147	K	302	917	900	3350	15.00	9.00
295/75R22.5	14	144/141	L	298	1012	760	2800	17.50	9.00
295/75R22.5	16	146/143	L	298	1012	830	3000	17.50	9.00
295/80R22.5	20	154/149	M	308	1048	900	3750	16.00	9.00
295/80R22.5	18	152/148	M	308	1048	850	3550	16.00	9.00
315/60R22.5	18	152/148	L	321	945	900	3550	15.00	9.75
315/60R22.5	20	154/150	L	321	945	900	3750	15.00	9.75
315/70R22.5	18	154/150	L	315	1005	900	3750	15.00	9.00
315/70R22.5	20	156/150	L	315	1005	900	4000	15.00	9.00
315/80R22.5	20	156/150	L	315	1076	850	4000	16.30	9.00

GL282A



- Low rolling resistance designing makes the fuel consumption of the vehicle significantly decrease and the cost of the truckload effectively decrease.
- Optimized shoulder profile designing improves tire's heat dispersion and increases crown durability.
- Completely new crown designing largely strengthens tire puncture resistance and effectively improves safety.
- Optimized groove designing guarantees tire wet grip performance.
- Mid/Long Haul Highway Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	16	146/143	M	273	1042	830	3000	14.30	8.25
295/80R22.5	18	152/148	M	305	1043	850	3550	15.30	9.00
295/80R22.5	20	154/149	M	305	1043	900	3750	15.30	9.00
315/70R22.5	18	154/150	L	316	1002	900	3750	15.30	9.00
315/70R22.5	20	156/150	L	316	1002	900	4000	15.30	9.00
315/80R22.5	18	154/151	M	313	1075	830	3750	15.80	9.00
315/80R22.5	20	156/150	L	313	1075	850	4000	15.80	9.00

GL286A



- Excellent compound improves tyre abrasion resistance and high speed performance.
- Four straight lines forming circumferential groove at center give tyre an excellent overall property on the trailer position.
- Unique sipes and lateral patterns improve tyre traction on wet road surfaces.
- Unique decoupling design at shoulder can effectively prevent tire from irregular wear.
- Improved rolling resistance design for increased fuel economy.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/55R22.5	20	160	K	400	992	900	4500	14.80	12.25
385/65R22.5	18	158	L	386	1068	830	4250	15.60	11.75
385/65R22.5	20	160	K	386	1068	900	4500	15.60	11.75
385/65R22.5	24	164	K	386	1068	900	5000	15.60	11.75
425/65R22.5	20	165	K	432	1110	830	5150	16.80	12.25



GL283A

- Dual compound tread with heat resistant material ensures suitability for long distance hauling.
- Specialized bead toe designed for improved durability.
- Mid/Long Haul Highway Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
10.00R20	18	149/146	J	276	1050	900	3250	15.80	7.50
10R17.5	16	139/137	K	250	850	860	2430	13.30	7.50
11.00R20	16	150/147	K	288	1084	830	3350	16.30	8.00
11R22.5	14	144/142	M	273	1049	720	2800	15.30	8.25
11R22.5	16	146/143	M	273	1049	830	3000	15.30	8.25
215/75R17.5	12	126/124	M	217	767	700	1700	12.30	6.00
215/75R17.5	16	135/133	J	217	767	860	2180	12.30	6.00
215/75R17.5	16	135/133	L	217	767	860	2180	12.30	6.00

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
225/70R19.5	14	128/126	N	230	813	760	1800	13.30	6.75
235/75R17.5	14	132/130	M	244	803	775	2000	13.30	6.75
235/75R17.5	16	143/141	J	244	803	860	2725	13.30	6.75
235/75R17.5	16	143/141	L	244	803	860	2725	13.30	6.75
245/70R19.5	16	136/134	M	252	841	830	2240	14.50	7.50
255/70R22.5	16	140/137	M	263	928	830	2500	14.50	7.50
265/70R19.5	16	140/138	M	272	867	775	2500	13.00	7.50
275/70R22.5	16	144/141	M	284	959	830	2800	15.30	8.25
275/70R22.5	18	148/145	M	284	959	900	3150	15.30	8.25
275/80R22.5	16	147/144	M	277	999	830	3075	15.30	8.25
275/80R22.5	18	149/146	L	277	999	900	3250	15.30	8.25
295/75R22.5	14	144/141	M	308	1016	760	2800	15.30	9.00
295/75R22.5	16	146/143	L	308	1016	830	3000	15.30	9.00

GL296A



- Unique tread pattern with straight grooves.
- Mid/Long Haul Highway Service.
- S shaped siping allows for excellent stability.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
295/80R22.5	18	152/148	M	308	1048	850	3550	16.10	9.00
295/80R22.5	20	154/149	M	308	1048	900	3750	16.10	9.00
315/80R22.5	18	154/151	M	325	1077	830	3750	16.90	9.00
315/80R22.5	20	156/150	L	325	1077	850	4000	16.90	9.00

GL655A



- Optimized distribution of bead materials improves the fatigue resistance.
- The advanced tread compound formula minimizes heat build-up at the shoulder area, resulting in improved durability.
- The overall performance is further strengthened than that of the original series products, and the tire ground footprint is more uniform.
- New contour design, more uniform grounding pressure, effective anti-eccentric wear.
- Widened running surface and deeper tread pattern make the tire's wear mileage longer.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
235/75R17.5	16	143	J	233	797	860	2725	13.50	6.75



GR-T ①

Premium Patterns



- Features new rubber compounds to minimize heat development in the tread.
- The tread compound improves rolling resistance and fuel efficiency.
- Robust casing for longer tire life and excellent retreadability

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
215/75R17.5	16	135/133	J	217	763	860	2180	13.50	6.00
235/75R17.5	16	143/141	J	238	792	860	2725	14.20	6.75
245/70R17.5	18	143/141	J	252	782	875	2725	13.00	7.50
245/70R19.5	18	141/140	J	252	835	850	2575	14.50	7.50
265/70R19.5	18	143/141	K	272	862	850	2725	12.50	7.50

GR-T ②

Premium Patterns



- Features new rubber compounds to minimize heat development in the tread.
- The tread compound improves rolling resistance and fuel efficiency.
- Robust casing for longer tire life and excellent retreadability.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/55R22.5	20	160	K	397	994	900	4500	14.50	12.25
385/65R22.5	20	160	K	386	1069	900	4500	16.00	11.75
385/65R22.5	24	164	K	386	1069	900	5000	16.00	11.75



GL251T



- Engineered to replace duals on highway and regional trailer axle fitments.
- Advanced tread compounds offer fuel efficiency balanced with wet traction and long even wear.
- The new generation wide base tire for trailer axles that deliver exceptional weight savings and fuel efficiency in regional and long-haul applications.
- Trailer Use Only.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/55R19.5	20	156	J	400	915	900	4000	13.30	12.25
435/50R19.5	20	160	J	434	928	900	4500	13.00	14.00
445/45R19.5	22	160	J	440	896	900	4500	14.00	15.00
445/50R22.5	20	161	L	444	1008	830	4625	13.00	14.00
455/40R22.5	20	160	J	450	934	900	4500	14.00	15.00

GL252T



- Excellent compound improves tyre abrasion resistance and high speed performance.
- Four straight lines forming circumferential groove at center give tyre an excellent overall property on the trailer position.
- Unique sipes and lateral patterns improve tyre traction on wet road surfaces.
- Unique decoupling design at shoulder can effectively prevent tire from irregular wear.
- Improved rolling resistance design for increased fuel economy.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/55R22.5	20	160	K	400	992	900	4500	15.00	12.25



GL285T



- Specialized tread compound designed for superb with inhanced wear at highway speeds.
- Tread pattern provides for excellent drainage and slip resistance.
- SmartWay approved. Low Emission Technology.
- Mid/Long Haul Trailer Service – Trailer Use Only.
- All-Steel Casing.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
ST235/80R16	14	129/125	M	235	790	760	1850	9.50	6.50
ST235/85R16	14	132/127	M	235	800	760	2000	9.50	6.50

GL286T



- Excellent compound improves tyre abrasion resistance and high speed performance.
- Four straight lines forming circumferential groove at center give tyre an excellent overall property on the trailer position.
- Unique sipes and lateral patterns improve tyre traction on wet road surfaces.
- Unique decoupling design at shoulder can effectively prevent tire from irregular wear.
- Improved rolling resistance design for increased fuel economy.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/55R22.5	20	160	K	400	992	900	4500	14.80	12.25
385/65R22.5	18	158	L	386	1068	830	4250	15.60	11.75
385/65R22.5	20	160	K	386	1068	900	4500	15.60	11.75
385/65R22.5	24	164	K	386	1068	900	5000	15.60	11.75
425/65R22.5	20	165	K	432	1110	830	5150	16.80	12.25

Urban Bus



GL868A

Premium Patterns

- Self-cleaning technology in the tread groove and ultra-thick tread bottom rubber design provide excellent dirt resistance and puncture resistance, ensuring optimal safety.
- Optimized groove shape improves drainage performance and wet skid resistance.
- Super deep pattern provides a longer service life.
- Thickened sidewall design effectively protects the shoulder from scratches and provides optimal sidewall protection.
- Special tread formula offers better resistance and fuel consumption.
- Patented super-strong bead toe design provides the tire with excellent load-bearing capacity and resistance to cracking.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
275/70R22.5	18	148/145	G	276	958	900	3150	16.50	8.25



GL688A

Premium Patterns



- Robust open shoulder provides outstanding traction and self-cleaning ability.
- Continuous center block pattern guarantees a stability drive on on&off road.
- Stone rejection design reduces stone retention and maximizes casing durability.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
12.00R24	20	160/157	K	316	1217	900	4500	18.80	8.50
325/95R24		162/160	K	316	1217	850	4750	18.80	9.00

GC-A ①

Premium Patterns



- The tire features a large block pattern design for excellent traction performance.
- The high-end contour design ensures even ground pressure distribution, resulting in high wear mileage.
- With a new formula design, the tire exhibits superior resistance to cutting and tearing.
- The optimized distribution of bead materials enhances the durability of the tire's bead.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	276	1058	720	2800	19.80	8.25
11R22.5	16	146/143	L	276	1058	830	3000	19.80	8.25
11R22.5	18	148/145	L	276	1058	850	3150	19.80	8.25
13R22.5	20	156/150	K	312	1118	875	4000	17.50	9.75
255/70R22.5	16	140/137	M	255	931	830	2500	16.50	7.50
275/70R22.5	18	148/145	M	284	960	900	3150	18.00	8.25
295/80R22.5	18	152/148	K	308	1048	850	3550	16.00	9.00
315/80R22.5	20	156/150	K	310	1076	850	4000	16.50	9.00



GC-D ①

Premium Patterns

- Outstanding traction and excellent on/off road wear performance.
- Features a robust 4-belt layer casing for maximum retreadability.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	14	144/142	M	276	1062	720	2800	22.80	8.25
11R22.5	16	146/143	L	276	1062	830	3000	22.80	8.25
13R22.5	20	156/150	K	312	1125	875	4000	21.50	9.75
295/75R22.5	14	144/141	L	298	1023	760	2800	22.80	9.00
295/75R22.5	16	146/143	L	298	1023	830	3000	22.80	9.00
295/80R22.5	18	152/148	K	308	1056	850	3550	19.80	9.00
315/80R22.5	20	156/150	K	315	1088	850	4000	22.30	9.00

GL687D

- Premium open shoulder with directional tread pattern.
- Deep tread with siping allows for superior traction in varying road conditions.
- SmartWay approved.
- Low Emission Technology.
- Mid/Long Haul Highway Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
245/70R19.5	16	136/134	M	256	842	830	2240	15.30	7.50
295/80R22.5	18	152/148	K	305	1054	850	3550	20.80	9.00
315/80R22.5	20	156/150	K	330	1086	850	4000	21.30	9.00
315/80R22.5	22	167/164	F	312	1082	950	5450	21.00	9.00



GL291A



- Unique corner design of the groove can avoid irregular wear .
- Unique groove bottom makes tire good self- clean property, which can effectively protect crown.
- Larger lateral groove at shoulder area guarantees tire better traction and grip.
- Optimized belt structure designing strengthens the rigidity and fflex at crown, Designed for uniform wear.
- Mid/Long Haul Highway Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
12.00R24	20	160/157	K	316	1212	900	4500	16.30	8.50

GL691A



- The GL691A boasts exceptional resistance to wear and tear, ensuring a longer-lasting performance.
- Its unique on/off-road compound contributes to high mileage capabilities.
- The reinforced belt design and robust casing provide unparalleled retread potential and structural integrity.
- GL691A provide excellent handling in all road conditions, ensuring a smooth and responsive ride.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
12.00R24	20	160/157	K	316	1212	900	4500	16.30	8.50



GL665A



- Deeper tread makes tire longer service life.
- Special pattern designing makes tire stronger traction.
- Lateral groove at shoulder area, which can strengthen heat dispersion, has higher durability.
- Completely new tread compound makes wear and tear resistance reach the optimum compromise.
- On & Off Road ALL-position Radial.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
13R22.5	20	156/150	K	317	1120	875	4000	17.80	9.75
315/80R22.5	20	156/150	K	325	1080	850	4000	18.50	9.00
315/80R22.5	20	157/154	L	325	1080	900	4125	18.50	9.00
315/80R22.5	22	167/164	F	312	1076	950	5450	18.00	9.00

GL680A



- The tire's exceptional compound imbues it with extraordinary resistance to abrasion, ensuring durability in various driving conditions.
- The longitudinal groove design enhances operational efficiency and enables superior high-speed performance.
- The lateral small and narrow grooves within the block design significantly enhance the tire's wet grip and substantially reduce the occurrence of irregular wear.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
325/95R24		162/160	K	316	1214	850	4750	17.30	9.00



GL682A



- Three central “Z” grooves and unique groove shape designing guarantee tire have excellent traction and brake performance.
- Bigger lateral groove at shoulder area guarantees better traction and grip.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
9.00R20	16	144	K	259	1019	900	2800	15.00	7.00
10.00R20	18	149	J	275	1039	930	3250	15.00	7.50
11.00R20	18	152	K	293	1085	930	3550	16.50	8.00
12.00R20	22	158	F	313	1122	950	4250	17.00	8.50

GL689A



- Specialized Z shaped grooves provide for excellent traction and braking abilities.
- Compound is specifically designed to ensure tear-resistance.
- The deep-grooved tread pattern allows for long service life.
- Short/Mid Haul Mixed Service.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/65R22.5	20	160	K	386	1074	900	4500	18.60	11.75
385/65R22.5	24	164	K	386	1074	900	5000	18.60	11.75
425/65R22.5	20	165	K	432	1114	830	5150	18.80	12.25
445/65R22.5	20	169	K	454	1144	900	5800	18.80	13.00



GL670T



- Open shoulder design improves tire adaptability to transportation under various mixed road conditions.
- Good heat dispersion gives tire excellent durability.
- Excellent compound makes tire super strong abrasion resistance.
- Optimized crown designing gives tire good puncture resistance.
- Strengthened carcass design gives tire longer service life and can be retreated several times.
- Trailer Use Only.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
385/65R22.5	20	160	K	388	1090	900	4500	17.50	11.75
385/65R22.5	24	164	K	388	1090	900	5000	17.50	11.75
445/65R22.5	20	169	K	454	1160	900	5800	17.50	13.00

GLE-1



- The exclusive herringbone pattern enhances grip, preventing tire slippage on slippery surfaces.
- With a semi-steel construction, the tire's sidewalls offer a balanced flexibility, ensuring superior traction and drive-ability on muddy and swampy terrains.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
425/85R21	22	160	G	425	1265	650	4500	24.00	12.00



GLE-2



- The exclusive herringbone pattern enhances grip, preventing tire slippage on slippery surfaces.
- With a semi-steel construction, the tire’s sidewalls offer a balanced flexibility, ensuring superior traction and drive-ability on muddy and swampy terrains.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
425/85R21	22	160	G	425	1265	650	4500	24.00	12.00

GL072A



- Each pattern block is robust and connected by reinforcing ribs, enhancing the tire’s resilience.
- The herringbone pattern offers powerful off-road performance.
- The design of low air pressure and wide contact area reduces ground pressure, improving off-road pass-ability.
- The new sidewall profile and scratch-resistant lines protect the sidewall from impacts and scratches.
- The central pattern blocks are connected by reinforcing ribs, ensuring the tire’s stability in handling and high-speed performance

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
425/85R21	20	160	J	425	1260	550	4500	24.00	12.00
425/85R21	22	167	G	425	1260	820	6500	24.00	12.00



GM-A ①

Premium Patterns



- The tire features a large block pattern design for excellent traction performance.
- The high-end contour design ensures even ground pressure distribution, resulting in high wear mileage.
- With a new formula design, the tire exhibits superior resistance to cutting and tearing.
- The optimized distribution of bead materials enhances the durability of the tire’s bead.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
315/80R22.5	22	158/156	G	315	1092	900	4250	24.30	9.00

GL073A



- Each pattern is interconnected by reinforcing ribs, which make tire have better toughness.
- Wide and deep lateral groove makes tire have strong traction and grip.
- Round shoulder profile makes tire have excellent cross-country property.
- Prominent curbing rib design of side direction can prevent sidewall from impacting and scratching of external force.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
14.00R20	20	164/161	G	376	1232	790	5000	20.00	10.00
16.00R20	18	173/170	G	438	1309	790	6500	20.80	11.25
395/85R20	22	168	G	396	1186	830	5000	25.30	11.00




GL909A

- It is designed for exceptional off-road traction such as mining applications .
- Unique groove design for higher self-cleaning ability.
- Deep tread prolongs service life for tire.
- Superior stability and resistance when running on mining road.

Size	Ply Rating	Load Index	Speed Symbol	Section Width (mm)	Overall Diam. (mm)	Infl. (KPa)	Max. Load (KG)	Tread Depth (mm)	Design Rim (in.)
11R22.5	16	146/143	G	273	1068	830	3000	23.80	8.25
12.00R20	18	154/151	F	305	1136	830	3750	25.80	8.50
12.00R20	22	158/155	F	305	1136	970	4250	25.80	8.50
12.00R24	★★★	164/162	G	320	1248	900	5000	31.30	8.50

TYRE SIDEWALL MARKS INSTRUCTION

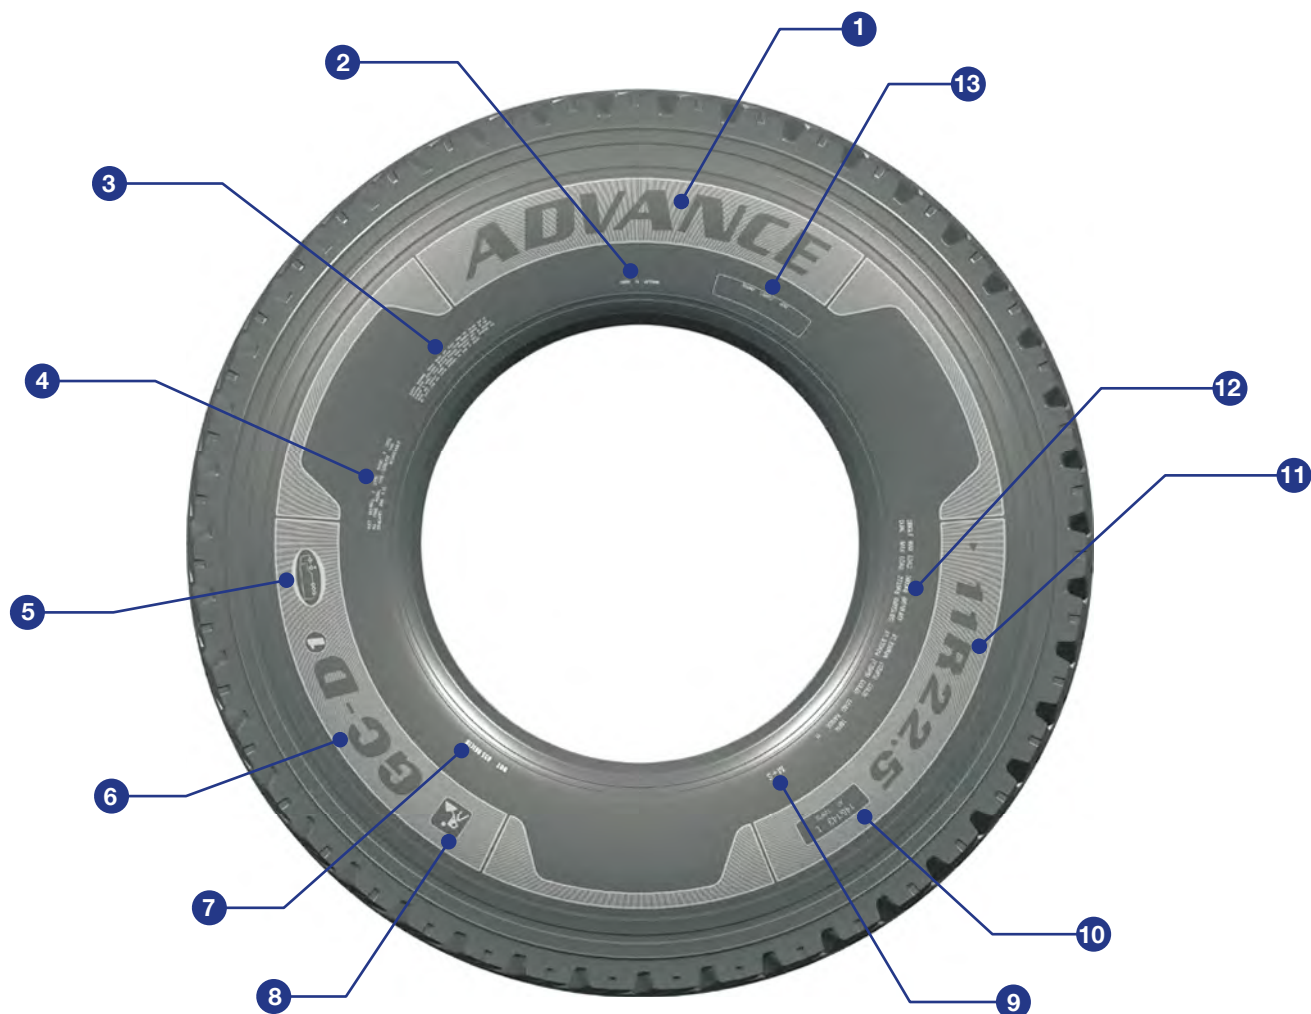

- 1 Brand Name

2 Manufacturing Country

3 Safety Warning

4 Carcass Struction, Tyre Type, Rim, Regroovable

5 Recommended Vehicle Type & Position

6 Pattern Name

7 Dot Code
- 8 Application

9 M+S

10 Load index, Speed Symbol

11 Tyre Size

12 Ply rating, Load Range

13 Blank For Retread Tyre Brand

TREAD PATTERN DESIGNATIONS

GL

2

83

A

+

1

2

3

4

5

1 GuiZhou Radial Tyre

2 Application

3 Serial Number

4 Position

5 Benefit

For example:

Application	1 = Long Haul Highway Service
	2 = Reginal Service
	6 = On & Off Road Service
	7 = Snow Service
	8 = Urban Buses Service
	9 = Off Road Service
	0 = Special Service
Position	S = Steer
	A = All Position
	D = Drive
	T = Trailer
Benefit	+ = Reinforced Bead Design
	ULT = Ultra Design

G

L

-

S

1

1

2

3

4

1 GuiZhou Radial Tyre

2 Application

3 Position

4 Serial Number

For example:

Application	L = Long Haul Highway Service
	R = Reginal Service
	C = Construction Service
	M = Mining Service
	U = Urban Service
Position	S = Steer
	A = All Position
	D = Drive
	T = Trailer

TECHNICAL DATA NOTE

- TBA - to be available
- PART NO. - SAMSON No.
- ERP NO. - ADVANCE No.
- L*-LOW ROLLING RESISTANCE
- 3Pro*-With super safety, excellent wear resistance, high fuel efficiency and remarkable comfort, the products of Guizhou Tyre are preferred for your long-distance and hazardous-chemicals transport.



SALES@ADVANCETYRE.BIZ

V2024